

# Cast Deckmount Sink Faucets – 8" Centers

**TECK**<sup>®</sup>  
COMMERCIAL

**DELTA**

## SPECIFICATION: (EXAMPLE)

- **HEAVY DUTY CAST BRASS** sink faucet
- 203mm (8") center two handle
- Polished chrome-plated finish
- **BRASS** swing spout or 3/8" IPS **BRASS PIPE** Rigid/Swivel Gooseneck Spout
- Metal hold-down package
- Color indexed metal handles with vandal resistant screws
- **CER-TECK**® 1/4 turn ceramic structures and ... with ... (add spout required)  
with ... (add outlet required)  
with ... (add handle required)  
with ... (add suffix **-LS** if required – See back page)  
with ... (add suffix **-TI** if required – See back page)

26C3944



26C3133



### Engineer/Architect Approval

Model Specified:

Approval:

Date:

## MODEL NUMBER EXAMPLE:

Configurations vary, see below for availability.

**26C3933-LS**

### Variation

- 1 = 8" (203 mm) Wallform spout
- 2 = 8" (203 mm) Tubular spout
- 9 = 6" (152 mm) Gooseneck spout

### Outlet

- 2 = Vandal resistant laminar outlet 1.5 gpm (5.7 L/min.)
- 3 = Vandal resistant aerator 1.5 gpm (5.7 L/min.)
- 4 = Standard aerator outlet 1.5 gpm (5.7 L/min.)
- 5 = Vandal resistant spray outlet 0.5 gpm (1.9 L/min.)
- 7 = Smooth end, laminar outlet 1.0 gpm (3.8 L/min.)

### Handle

- 1 = 5-fluted
- 2 = Hooded blade
- 3 = Hooded lever
- 4 = Blade with sanitary hood
- 5 = Wrist with sanitary hood

**LS** = 120° Limited swing gooseneck

**TI** = Handle temperature indicators "H" (red), "C" (blue)

**R\*** = Optional gooseneck spout dimensions:

R2 = 4.5" long, 11.7" high

R5 = 6" long, 13.2" high

R6 = 6" long, 14.8" high

R7 = 9" long, 13.9" high

**S\*** = Optional swing spout dimensions:

S3 = 6" Tubular

S7 = 11" Tubular

S8 = 14" Tubular

AVAILABLE MODELS	VARIATIONS						
	1 Wallform S2 Spout 8" (203 mm)	2 Tubular S5 Spout 8" (203 mm)	9 Gooseneck R4 Spout 6" (152 mm) long, 11.6" (294.6 mm) high				
<b>1</b> 5-Fluted	26C3131 26C3141	26C3221 26C3231 26C3241	26C3931 26C3931-R7 26C3951				
<b>2</b> Hooded Blade 4" (102 mm)	26C3122 26C3132 26C3142 26C3152	26C3222 26C3222-TI 26C3232 26C3232-S7 26C3242	26C3242-S8 26C3242-TI 26C3252 26C3252-S8	26C3922 26C3922-R7 26C3922-TI 26C3932 26C3932-LS-TI 26C3932-R2	26C3932-R5 26C3932-R7 26C3942 26C3942-R5 26C3942-R6	26C3942-R7 26C3952 26C3952-R7 26C3972 26C3972-R7	
<b>3</b> Hooded Lever 3" (76 mm)	26C3123 26C3133 26C3133-TI 26C3143 26C3143-TI 26C3153	26C3223 26C3223-S8 26C3233 26C3233-S7 26C3233-S8 26C3233-TI 26C3243	26C3243-S3 26C3243-S7 26C3243-S8 26C3243-TI 26C3253 26C3253-S7 26C3253-S8	26C3923 26C3923-LS-TI 26C3933 26C3933-LS 26C3933-LS-TI 26C3933-R5	26C3933-R7 26C3943 26C3943-R2 26C3943-R5 26C3943-R7 26C3953	26C3953-LS-TI 26C3953-R7 26C3953-TI 26C3973 26C3973-TI	
<b>4</b> Blade with Sanitary Hood 4" (102 mm)	26C3124 26C3134 26C3144 26C3154	26C3224 26C3234 26C3244 26C3244-S7	26C3244-S8 26C3244-S8TI 26C3254 26C3254-S8	26C3924 26C3924-LS 26C3924-R2 26C3924-R7 26C3924-TI 26C3934 26C3934-LS 26C3934-LS-TI	26C3934-R2 26C3934-R5 26C3934-R7 26C3944 26C3944-LS 26C3944-R2 26C3944-R6 26C3944-R7	26C3944-TI 26C3954 26C3954-R5 26C3954-R7 26C3974 26C3974-R2 26C3974-R7	
<b>5</b> Wrist with Sanitary Hood 6" (152 mm)	26C3155	26C3235		26C3935 26C3945 26C3955-R6 26C3955-R7 26C3975-R7			

Note: Use this page front and back as a product submittal sheet. Refer to [www.specselect.com](http://www.specselect.com) for individual models.

Flow Rates are at 60 PSI.

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or [www.specselect.com](http://www.specselect.com) for finish options and product availability.

**DSP-26C** Rev. F

# Cast Deckmount Sink Faucets – 8" Centers

**TECK**  
COMMERCIAL


**DELTA**

## APPROVALS:

- CSA certified
- Complies to ASME A112.18.1/CSA B125.1
-  Indicates compliance to ICC/ANSI A117.1
- Verified compliant with 0.25% weighted average Pb content regulations


(Contact Delta Representative for State and/or Local Approvals.)

## FLOW RATE vs PRESSURE

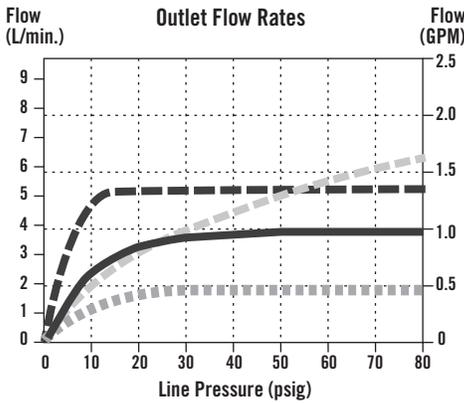

## HANDLE TEMPERATURE INDICATORS

- Suffix “-TI” signifies handle temperature indicators “H” (red), “C” (blue). Available on selected models.



## LIMITED SWING GOOSENECK

- Suffix “-LS” signifies 120° Limited Swing. Available on selected models.


## FOR OPTIONAL RIGID/SWIVEL & LIMITED SWING SPOUTS

See DSP-R/S for detailed specification.

## FOR OPTIONAL SWING SPOUTS

See DSP-S/S for detailed specification.

Note: Measurements may vary ± 6mm (0.25")

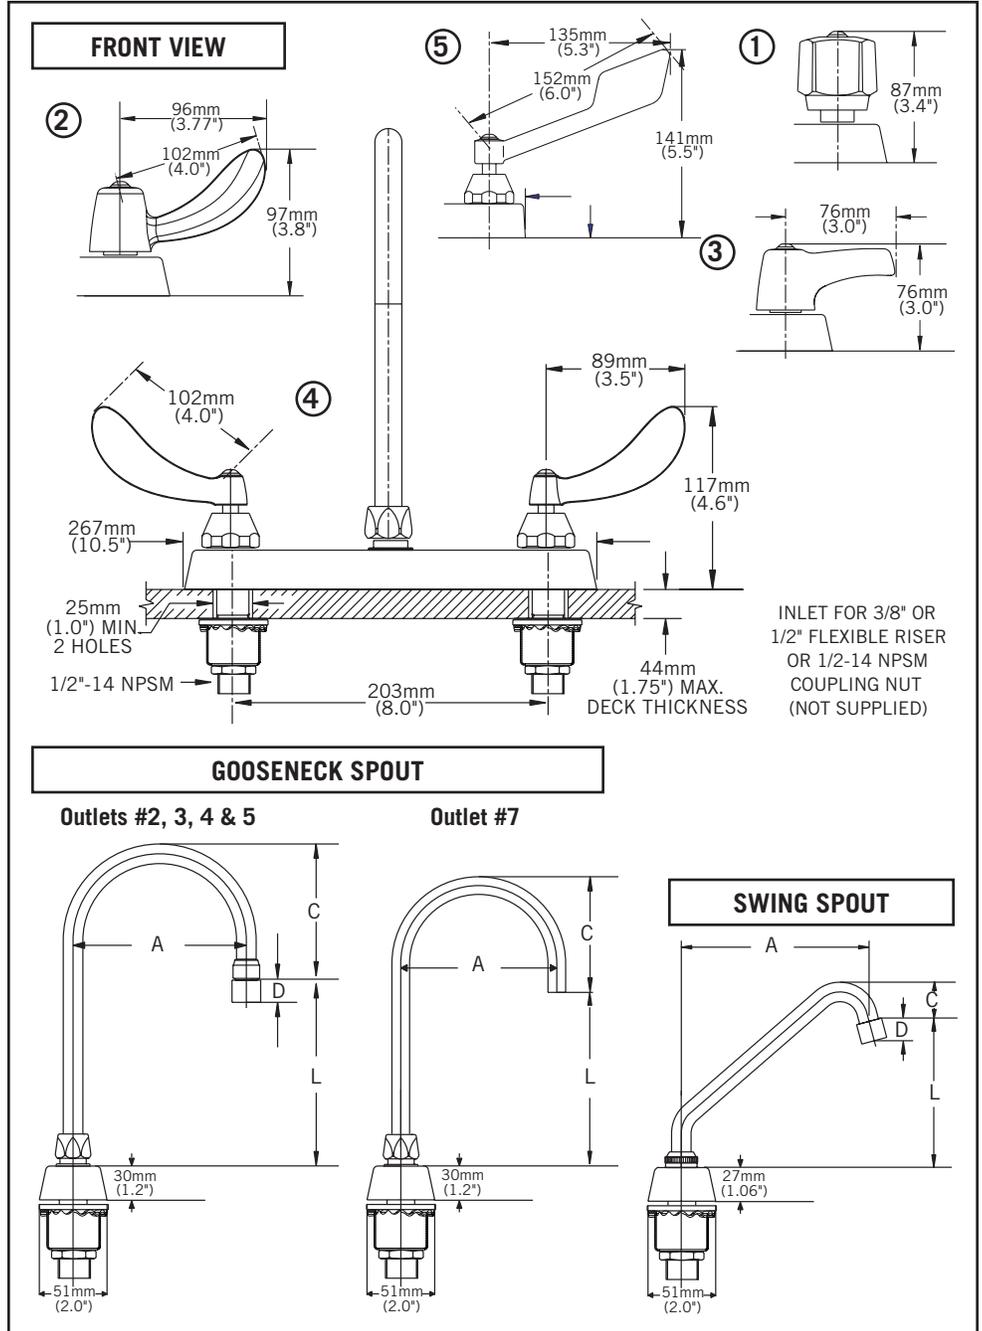

OUTLET NO.	"D"	
	mm	in.
2	18	0.69
3	18	0.69
4	17	0.67
5	18	0.69

GOOSENECK SPOUT ASSEMBLIES						
SPOUT/OUTLET	"A"		"C"		"L"	
	mm	in.	mm	in.	mm	in.
Gooseneck-Standard (R4) for outlets #2, 3, 4 & 5	152	6	124	4.9	146	5.8
Gooseneck-Standard (R4) for outlet #7	152	6	117	4.6	152	6.0

SWING SPOUT ASSEMBLIES							
SPOUT NO.	SPOUT TYPE	"A"		"C"		"L"	
		mm	in.	mm	in.	mm	in.
1	8" Wallform Spout (S2)	206	8.1	15	0.6	130	5.1
2	8" Tubular Spout (S5)	210	8.25	51	2.0	147	5.8

Refer to www.specselect.com for individual models.

Note: Use this page front and back as a product submittal sheet.