

C-134/234 Series Freezeless Wall Hydrant









C-234 Loose Key Design

- Residential
- **Freezeless**
- Metal Handle
- Satin Nickel Plated

Original Heavy Duty Style

PRIER C-134 provides a year round source of water in areas that are subject to freezing temperatures. The hydrant valve is connected to the supply piping in the heated portion of the structure, eliminating the possibility of freezing. Ordering the C-234 gives you the same style hydrant but with a vandal proof extended lockshield and operating key.

The PRIER C-134 is the original freezeless hydrant that is made in the same heavy pattern fashion that made it famous. It is available from stock in lengths from close coupled to 24". Longer sizes are available upon request.

FEATURES

- Wide and enclosed screw holes easily secure mounting screws
- Integral cast flange with built-in drainage pitch
- Solid brass body, valve stem cap, seat and stem ends
- Satin nickel plated body maintains attractive finish
- Stainless steel screws
- Powder coated cast aluminum handle
- Lock shield cap
- AFG teflon with graphite packing for easy maintenance
- Standard "OO" size seat washer
- Each valve air-tested at factory for leak-free quality
- Spout aligning mark with manufacturer's date code

ORDERING



- 1- Handle Operated
- 2- Vandal Proof Lockshield

Length CC- Close Coupled

- **04-** 4" Insertion
- 06-6" Insertion
- 08-8" Insertion
- **10-** 10" Insertion
- 12- 12" Insertion
- 14- 14" Insertion
- 16- 16" Insertion
- 18- 18" Insertion
- 20- 20" Insertion
- 22- 22" Insertion
- 24- 24" Insertion
- XX- Special Size

INLET STYLES



D Style



1/2" MPT x 1/2" SWT



X Style 1/2" Crimp PEX



T Style



34" MPT x 1/2" FPT



W Style 1/2" Wirsbo® PEX



C Style 1/2" CPVC Glue-In



FX Style 3/4" Crimp PEX



S Style 1/2" SWT x 3/4" Push-On



FW Style



T- 3/4" MPT x 1/2" FPT

C-1/2" CPVC Glue-In

X- 1/2" Crimp PEX

W- 1/2" Wirsbo® PEX

FX- 3/4" Crimp PEX

Y- 1/2" Press-Fit

FW- 3/4" Wirsbo® PEX

F- 3/1" SWT

S- 1/2" SWT x 3/4" Push-On

G-1/2" SharkBite Push-Fit

F Style 3/4" SWT




1/3" SharkRite Push-Fit



Y Style 1/2" Press-Fit



C-134 REPLACEMENT PARTS

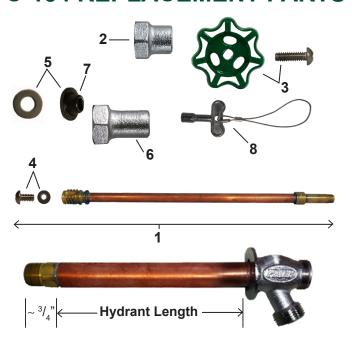

| ID | Part No. | Description | | |
|----|----------------------------------|---|--|--|
| 1 | See Replacement Stems Section | Stem Assembly, Contains: 1, 4 | | |
| 2 | 300-1008 | Valve Stem Cap | | |
| 3 | C-134KT-805 | Oval Handle and Screw Kit | | |
| 4 | C-134KT-802 | Seat Washer Replacement Kit (00 Beveled) | | |
| 5 | C-134KT-803 | Stem Packing Replacement Kit | | |
| 6 | 310-1015 | Valve Stem Cap for Loose Key | | |
| 7 | 390-1001 | Stem Packing Only | | |
| 8 | C-108KT-808 | Oval Style Key on Lanyard | | |
| | C-134KT-804 | Handle to Loose Key Conversion Kit Contains: 5, 6, 8 | | |
| | C-234KT-804 | Loose Key to Handle Conversion Kit Contains: 2, 3, 5 | | |
| | C-134KT-807 | C-134 Overhaul Kit Contains: 3, 4, 5 | | |

REPLACEMENT STEMS



G Style Manufactured April 2013 - Present

| Part No. | Style | Description | Stem Length |
|------------|-------|---|--|
| P-231-11CC | G | Close Coupled Stem for C-134 Hydrant | 4 ³ / ₈ " OAL |
| P-231-1104 | G | Stem for 4" C-134 Hydrant | 6 ⁷ / ₈ " OAL |
| P-231-1106 | G | Stem for 6" C-134 Hydrant | 8 ⁷ / ₈ " OAL |
| P-231-1108 | G | Stem for 8" C-134 Hydrant | 10 ⁷ / ₈ " OAL |
| P-231-1110 | G | Stem for 10" C-134 Hydrant | 12 ⁷ / ₈ " OAL |
| P-231-1112 | G | Stem for 12" C-134 Hydrant | 14 ⁷ / ₈ " OAL |
| P-231-1114 | G | Stem for 14" C-134 Hydrant | 16 ⁷ / ₈ " OAL |
| P-231-1116 | G | Stem for 16" C-134 Hydrant | 18 ⁷ / ₈ " OAL |
| P-231-1118 | G | Stem for 18" C-134 Hydrant | 20 ⁷ / ₈ " OAL |
| P-231-1120 | G | Stem for 20" C-134 Hydrant | 22 ⁷ / ₈ " OAL |
| P-231-1122 | G | Stem for 22" C-134 Hydrant | 24 ⁷ / ₈ " OAL |
| P-231-1124 | G | Stem for 24" C-134 Hydrant | 26 ⁷ / ₈ " OAL |
| P-231-11US | G | *Universal Replacement Stem for C-134 Hydrant | Up to 16 ⁷ / ₈ " OAL |

^{**}For stems manufactured before 2013, see C-134 Series retired style spec sheet at PRIER.com. PRI-ER universal stems are replacement stems for any size from close coupled to 14." The P-231-11US Universal Stem requires cutting the rod to proper length and soldering the brass stem end to the rod as directed in instructions.