




# Z1202-1H\_4

EZCARRY® ADJUSTABLE VERTICAL HIGH PERFORMANCE SIPHON JET HUB AND SPIGOT WATER CLOSET CARRIER SYSTEM W/ SIDE INLET

SPECIFICATION SHEET

TAG \_\_\_\_\_

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

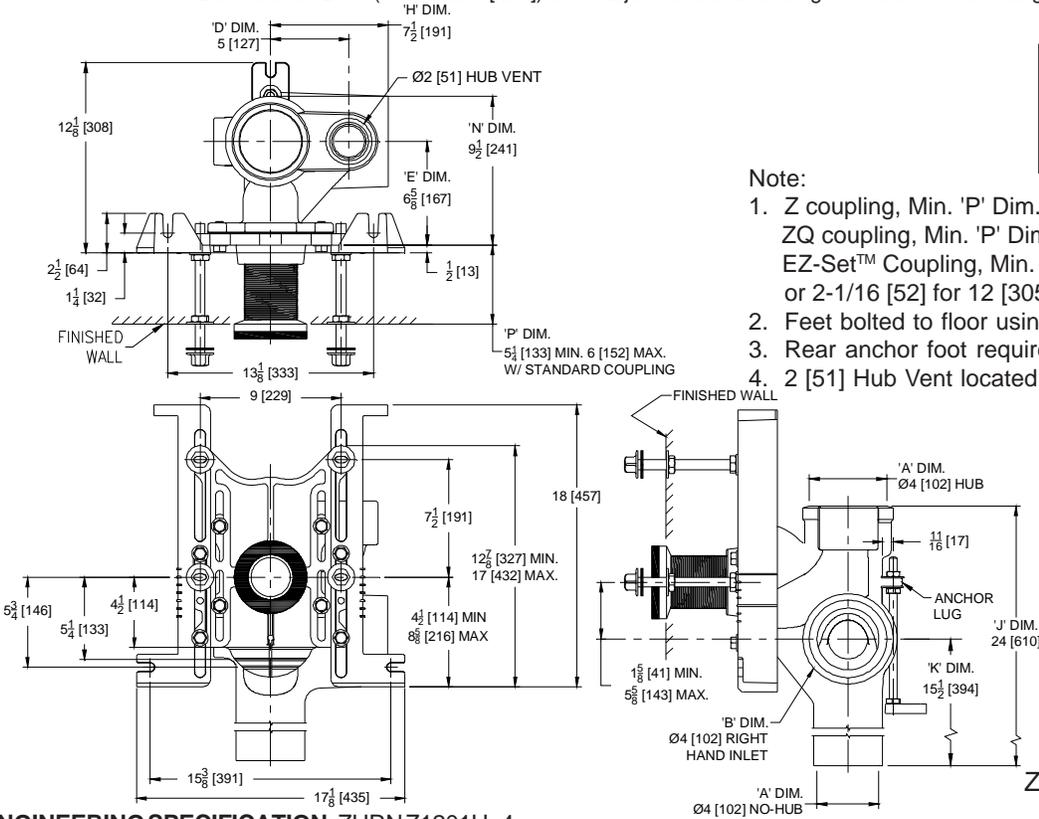

Product Number	Approx. Wt. lbs [kg]
Z1202-1HL4	88 [40]
Z1202-1HR4	88 [40]

**Note:**

1. Z coupling, Min. 'P' Dim. Obtainable = 2 [51].  
ZQ coupling, Min. 'P' Dim Obtainable = 5 [127]  
EZ-Set™ Coupling, Min. 'P' Dim. Obtainable = 4-1/4 [108] or 2-1/16 [52] for 12 [305] NPT.
2. Feet bolted to floor using min. 1/2 [13] dia. anchors.
3. Rear anchor foot required for secure installation.
4. 2 [51] Hub Vent located on same side as 4 [102] side inlet.

**ENGINEERING SPECIFICATION: ZURN Z1201H\_4**

EZCarry® vertical siphon jet water closet carrier system with high performance waterway and 4" [102mm] hub and spigot connections. System includes Dura-Coated cast iron main fitting with hydro-mechanically optimized sweep and extended 2" [51mm] vent, 4" [102mm] side inlet, adjustable gasketed faceplate, floor mounted pre-fab slotted foot supports with top anchoring pre-fab support base, heavy-duty 1/2" [13mm] rear anchor tie down, fixture bolts, trim, stud protectors, bonded "Neo-Seal" gasket, and corrosion resistant, adjustable 3" [76mm] dia. X 6" [152mm] coupling with integral test cap designed to increase flow velocity and line carry. EZCarry® system complies with the requirements of ASME A112.6.1M up to a 500 lbs [227 kg] static load rating.

**OPTIONS** (Check/specify appropriate options)

- \_\_\_ Z1202-1HL4      4 [102] Hub and Spigot Stack, Single Inlet, 4 [102] Left Hand Side Inlet, 2 [51] Left Hand Vent.
- \_\_\_ Z1202-1HR4      4 [102] Hub and Spigot Stack, Single Inlet, 4 [102] Right Hand Side Inlet, 2 [51] Right Hand Vent.

**PREFIXES**

- \_\_\_ Z      D.C.C.I. System with Zurn ZZ Adjustable Coupling\*
- \_\_\_ ZQ      D.C.C.I. System with NPT Faceplate, Non-Adjustable Coupling

**SUFFIXES**

- \_\_\_ -A      Auxiliary Support Assembly (For 'P' Dim. Greater than 18 [457])
- \_\_\_ -CC      Corrosion Resistant Cast Iron Coupling (2-1/4 [57] to 12 [305])
- \_\_\_ -CE      EZ-Set™ Coupling (NPSM 6 [152], 12 [305] or custom) (NPT 12 [305] or custom)
- \_\_\_ -CL      Custom Length Standard Coupling with Integral Test Cap (Specify Length 4, 8, 10, 12 [102, 203, 254, 305])
- \_\_\_ -CS      2-1/4 [57] Polymer Coupling with Integral Test Cap
- \_\_\_ -F      Floor Mounted, Back Outlet Fixture Support
- \_\_\_ -G      Galvanized Cast Iron
- \_\_\_ -JL      2 [51] Left-Hand Auxiliary Inlet (For 1HR4 Only)
- \_\_\_ -JR      2 [51] Right-Hand Auxiliary Inlet (For 1HL4 Only)
- \_\_\_ -M      Auxiliary Foot Support (for 'P' Dim. 7 thru 18 [178 thru 457])
- \_\_\_ -RYK17      One Piece Unistrut Pre-Fab Foot
- \_\_\_ -VL      Left Hand Vent Connection (For 1HR4 Only)
- \_\_\_ -VP      Vandal-Proof Trim
- \_\_\_ -X2      2 [51] Carrier Foot Extension Assembly
- \_\_\_ -X3      3 [76] Carrier Foot Extension Assembly
- \_\_\_ -45      Finishing Frame for Siphon Jet System
- \_\_\_ -50      Flush Valve Supply Support for Water Closets

\* Regularly furnished unless otherwise specified.