




# Z1202-2HD4

EZCARRY® ADJUSTABLE VERTICAL BACK-TO-BACK  
HIGH PERFORMANCE SIPHON JET HUB AND SPIGOT  
WATER CLOSET CARRIER SYSTEM W/ TWO SIDE INLETS

SPECIFICATION SHEET

TAG \_\_\_\_\_

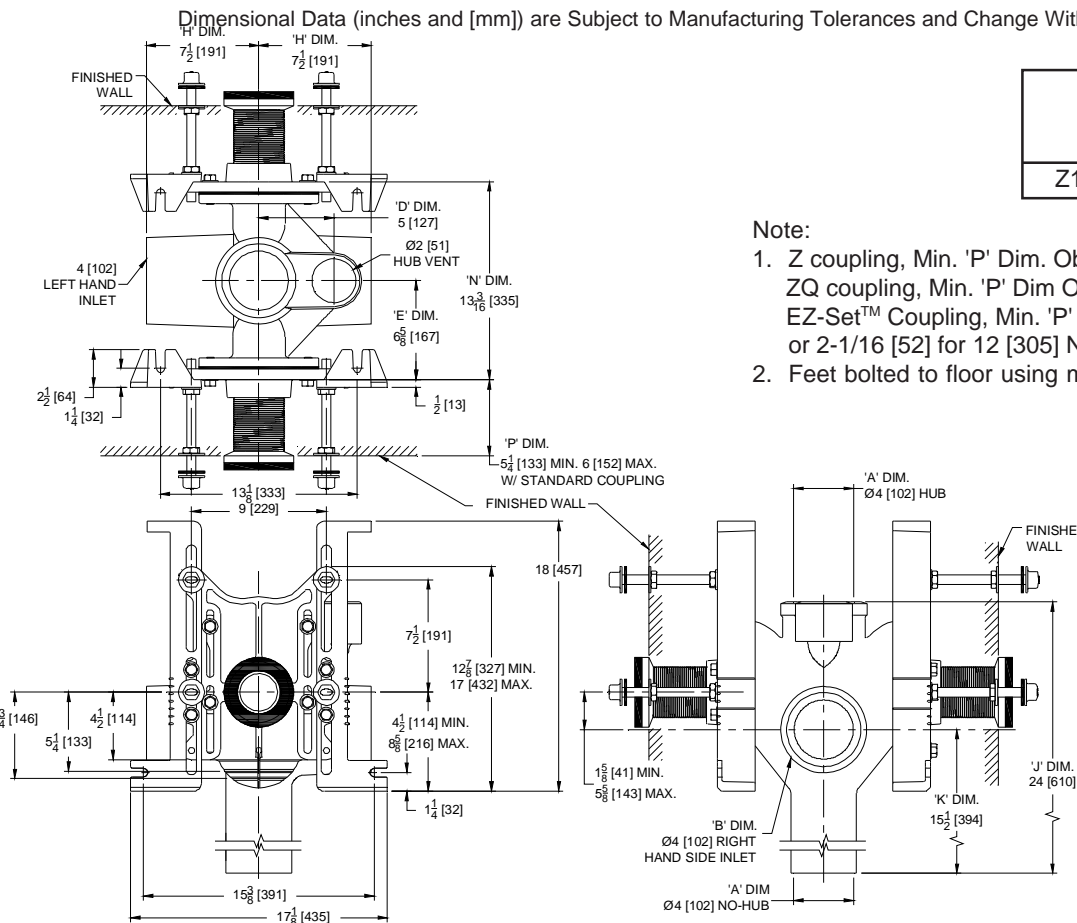

Product Number	Approx. Wt. lbs [kg]
Z1202-2HD4	154 [70]

## Note:

1. Z coupling, Min. 'P' Dim. Obtainable = 2 [51].  
ZQ coupling, Min. 'P' Dim Obtainable = 5 [127]  
EZ-Set™ Coupling, Min. 'P' Dim. Obtainable = 4-1/4 [108] or 2-1/16 [52] for 12 [305] NPT.
2. Feet bolted to floor using min. 1/2 [13] dia. anchors.

## ENGINEERING SPECIFICATION: ZURN Z1202-2HD4

EZCarry® vertical siphon jet water closet carrier system with high performance waterway and 4" [102mm] hub and spigot connections. System includes Dura-Coated cast iron double main fitting with hydro-mechanically optimized sweep and extended 2" [51mm] vent, with two 4" [102mm] side inlets, adjustable gasketed faceplates, floor mounted pre-fab slotted foot supports with top anchoring pre-fab support base, fixture bolts, trim, stud protectors, bonded "Neo-Seal" gaskets, and corrosion resistant, adjustable 3" [76mm] dia. X 6" [152mm] couplings with integral test caps designed to increase flow velocity and line carry. EZCarry® system complies with the requirements of ASME A112.6.1M up to a 500 lbs [227 kg] static load rating.

## OPTIONS (Check/specify appropriate options)

Z1202-2HD4 4 [102] Hub and Spigot Stack, Double Inlets, Two 4 [102] Side Inlets, 2 [51] Vent

## PREFIXES

- \_\_\_ Z D.C.C.I. System with Zurn ZZ Adjustable Coupling\*  
\_\_\_ ZQ D.C.C.I. System with NPT Faceplate, Non-Adjustable Coupling

## SUFFIXES

- \_\_\_ -A Auxiliary Support Assembly  
(For 'P' Dim. Greater than 18 [457])  
\_\_\_ -CC Corrosion Resistant Cast Iron Coupling  
(2-1/4 [57] to 12 [305])  
\_\_\_ -CE EZ-Set™ Coupling (NPSM 6 [152], 12 [305] or custom)  
(NPT 12 [305] or custom)  
\_\_\_ -CL Custom Length Standard Coupling with Integral Test Cap  
(Specify Length 4, 8, 10, 12 [102, 203, 254, 305])  
\_\_\_ -CS 2-1/4 [57] Polymer Coupling with Integral Test Cap  
\_\_\_ -F Floor Mounted, Back Outlet Fixture Support  
\_\_\_ -G Galvanized Cast Iron  
\_\_\_ -M Auxiliary Foot Support  
(for 'P' Dim. 7 thru 18 [178 thru 457])  
\_\_\_ -RYK17 One Piece Unistrut Pre-Fab Foot  
\_\_\_ -VP Vandal-Proof Trim  
\_\_\_ -X2 2 [51] Carrier Foot Extension Assembly  
\_\_\_ -X3 3 [76] Carrier Foot Extension Assembly  
\_\_\_ -45 Finishing Frame for Siphon Jet System  
\_\_\_ -50 Flush Valve Supply Support for Water Closets

\* Regularly furnished unless otherwise specified.

Zurn Industries, LLC | Specification Drainage Operation  
1801 Pittsburgh Avenue, Erie, PA U.S.A. 16502 · Ph. 855-663-9876, Fax 814-454-7929  
In Canada | Zurn Industries Limited  
7900 Goreway Drive, Unit 10, Brampton, Ontario L6T 5W6, Ph. 877.892.5216  
[www.zurn.com](http://www.zurn.com)

Rev. H  
Date: 10/30/2019  
C.N. No. 142119  
Prod. | Dwg. No. Z1202-2HD4