

Clear Vinyl Tubing

Product

Clear Vinyl Tubing

Purpose


Clear vinyl hose applications include: air conditioning and refrigeration condensate drains, condensate pump discharge lines and humidifier overflows.

Features

- Sizes from 3/16" to 1" diameters
- Non-toxic Clear Vinyl Chloride (PVC)
- Resists crimping and kinking

General Specifications

- Durometer Value = 86 (Shore A)
- Service Temperature = 140°F (60°C)

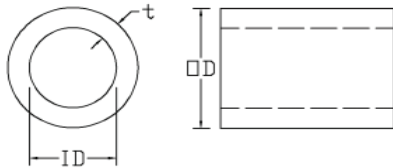

General Characteristics

| Part # | Weight (lbs) | Length (ft) | ID (in) | Min ID (in) | Max ID (in) | OD (in) | Min OD (in) | Max OD (in) | Wall Thickness in | Wall T. Min (in) | Wall T. Max (in) |
|--------|-----------------|----------------|------------|----------------|----------------|------------|----------------|----------------|----------------------|---------------------|---------------------|
| 7-316 | 1.46 | 100 | 0.188 | 0.184 | 0.191 | 0.264 | 0.260 | 0.267 | 0.038 | 0.034 | 0.042 |
| 7-14 | 2.15 | 100 | 0.250 | 0.245 | 0.255 | 0.336 | 0.331 | 0.341 | 0.043 | 0.038 | 0.048 |
| 7-38 | 3.59 | 100 | 0.371 | 0.364 | 0.378 | 0.471 | 0.464 | 0.478 | 0.050 | 0.043 | 0.057 |
| 7-12 | 5.84 | 100 | 0.485 | 0.475 | 0.495 | 0.610 | 0.601 | 0.619 | 0.063 | 0.053 | 0.072 |
| 7-58 | 8.43 | 100 | 0.598 | 0.586 | 0.610 | 0.745 | 0.734 | 0.756 | 0.074 | 0.062 | 0.085 |
| 7-34 | 13.06 | 100 | 0.705 | 0.691 | 0.719 | 0.896 | 0.883 | 0.909 | 0.096 | 0.082 | 0.109 |
| 7-78 | 9.29 | 50 | 0.800 | 0.784 | 0.816 | 1.037 | 1.021 | 1.053 | 0.119 | 0.103 | 0.134 |
| 7-10 | 12.44 | 50 | 0.923 | 0.905 | 0.942 | 1.198 | 1.180 | 1.216 | 0.137 | 0.119 | 0.156 |